Shanghai Jiameng International Trading Co., Ltd



4F,Yindong Plaza,No.58 Xinjinqiao RD. Pudong(201206) Shanghai China Tel: +86-21-6165 6998 Fax: +86-21-6165 6995 www.melec.com.cn

1kV Heat Shrinkable Cable Accessories

MELEC 1kV heat shrinkable cable accessories are suitable for 0.6/1.0(1.2) kV, insulated with PVC, XLPE and PE polymeric cables. Kits cover a wide range of cable sizes and varying cable constructions.

These accessories can be equipped with either crimping or mechanical lugs and connectors. MELEC mechanical lugs and connectors can be easily installed by a socket spanner without the need of crimping tools. Besides, they can reduce stock requirement because of their wide span range.

Features

- Compact dimensions
- Hot melting adhesive provides advanced sealing and insulating performance.
- Excellent corrosion resistance
- UV resistance and weathering resistance
- Halogen-free
- Superior electrical and mechanical properties

Standard

EN 50393

Performance

Test	Requirements	
AC voltage withstand(in air)	4kV, 1 min. No failure.	
Insulation resistance(in air)	≥50MΩ	
Impact at ambient temperature (only for joints)	A 4kg block dropped onto the accessory from a height of 1 m; Immersed for a minimum of 3h in water with depth of 1m	
AC voltage withstand(immersed) (only for joints)	4kV, 1 min. No failure.	
Insulation resistance(immersed) (only for joints)	≥50MΩ	
Heating cycle(in air)	Heat the conductor to 75°C-95°C, 63 times in air. No failure.	
Heating cycle(in water)	Heat the conductor to 75°C-95°C, 63 times in water. No failure.	
AC voltage withstand(in water)	4kV, 1 min. No failure.	
Insulation resistance(in water)	≥50MΩ	




4F,Yindong Plaza,No.58 Xinjinqiao RD. Pudong(201206) Shanghai China Tel: +86-21-6165 6998 Fax: +86-21-6165 6995 www.melec.com.cn

1kV Heat Shrinkable Straight Joint Accessories

Application

MDJ is suitable for multicore, unarmoured cables.

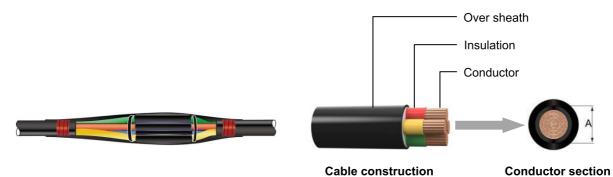

Cores	Туре	Cross-section (mm²)	Min. Dia over Insulation A (mm)	Max. Dia over Connectors (mm)	Max. Length of Connector (mm)	Recommended Connectors
	MDJ-4-01-A	10-35	4.6	14.0	85	
	MDJ-4-01-B	50-95	9.3	22.0	110	GTY
	MDJ-4-01-C	120-185	14.2	28.5	125	GLI GTD CLL
4-core	MDJ-4-01-D	240-300	20.4	36.0	145	
	MDJ-4-01-E	300-400	25.7	38.5	210	

Note: CLL mechanical connector is suitable for cross-section from 10 to 300mm². Please consult MELEC sales for more details about cable connectors.

Standard Package List

Items	Selection
CABLE CONNECTOR	
HEAT SHRINKABLE TUBING	•
HEAT SHRINKABLE TUBING	•
WATERPROOF SEALING MASTIC	•
PVC TAPE	
EMERY CLOTH	
CLEANING KIT	
CLEANING CLOTH	
UNDERSHIRT CLOTH GLOVES	
INSTALLATION INSTRUCTION	•
PACKAGE LIST	•

Note: ■ The marked items are basically required.

 $\hfill \square$ MELEC also provides customized set. Just tick on for your needs.

Please consult MELEC sales for more details.